


B-40M-V Vari-focal IR Camera with OSD function

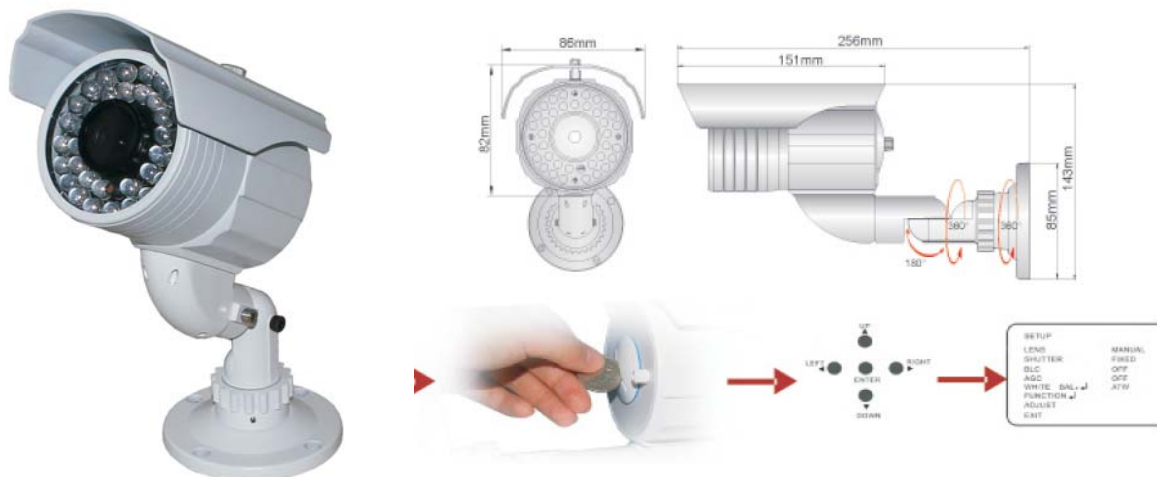

Main Features

OSD Control

Housing and bracket are designed all-in-one, the cables can not be cut easily by destroyer

Built with 36 $\Phi 5$ Led's, 4-9mm vari-focal lens IR Distance 40m

With dual glasses technology, it will avoid any possible IR reflection

With OSD function, support BLC, AGC, L and ect control.

Outdoor and indoor use

1.3KG with bracket

Size: 82x151 (L) mm

Specification

Model No:	VG-BSO48IR40M-V	VG-BSO54IR40M-V
Image Sensor	1/3" SONY CCD	
Signal	PAL/NTSC	
Horizontal	480 TVL	540 TVL
Min	0 LUX	0 LUX
S/N Ratio	More than 48dB(AGC off)	
Shutter Speed	NTSC=1/60-1/100,000 seconds; PAL=1/50-1/100,000 seconds	
Video Output	1 Vp-p75 ohm	
Power	DC 12V	
Current	550mA	
Lens	4-9 mm vari-focal lens	
IR LEDs	36 $\Phi 5$ Led's	
IR distance	40 m	